
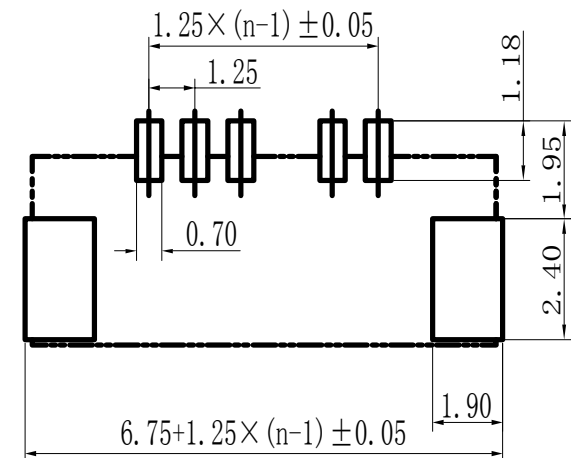
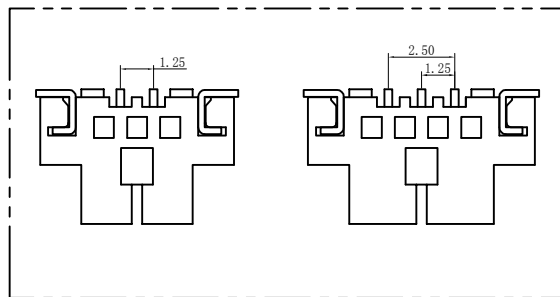
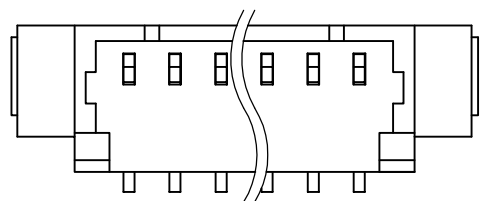


SECTION A-A



PC BOARD LAYOUT

Specifications:
 Housing: LCP UL94-V0 Color: Nature
 Contact: Phosphor Bronze
 Operating Voltage: 125V AC/DC
 Current Rating: 1A AC/DC
 Withstand Voltage: 500V AC/Minute
 Contact Resistance: $\leq 20m\Omega$
 Insulation resistance: $\geq 100m\Omega$
 Operating Temperature: $-25^{\circ}C \sim +85^{\circ}C$

P 数	DIM=A	DIM=B	DIM=C
002	1.25		7.62
003	2.50		8.87
004	3.75	2.50	10.12
005	5.00	3.75	11.37
006	6.25	5.00	12.62
007	7.50	6.25	13.87
008	8.75	7.50	15.12
009	10.00	8.75	16.37
010	11.25	10.00	17.62
011	12.50	11.25	18.87
012	13.75	12.50	20.12
013	15.00	13.75	21.37
014	16.25	15.00	22.62
015	17.50	16.25	23.87
016	18.75	17.50	25.12
017	20.00	18.75	26.37
018	21.25	20.00	27.62
019	22.50	21.25	28.87
020	23.75	22.50	30.12

一般公差
 TOLERANCES
 X. ± 0.40 .XX ± 0.20
 .X ± 0.30 .XXX ± 0.10
 ANGLES $\pm 2^{\circ}$

深圳市宏利电子有限公司
 Shenzhen Holy Electronic Co.,Ltd

检验尺寸标示
 SYMBOLS \odot \ominus INDICATE
 CLASSIFICATION DIMENSION

工程
 图号 MX125LB-nP

制图 (DR)
 '08/5/16

\odot MARK IS CRITICAL DIM.
 \ominus MARK IS MAJOR DIM.

品名 MX1.25mm - nP 立贴
 TITLE MX1.25mm Pitch LB FOR
 SMT CONN

审核 (CHKD)

核准 (APPD)
 Rigo Lu

表面处理 (FINISH)

比例 (SCALE) 1:1

单位 (UNITS) mm

张数 (SHEET) 1 OF 1

尺寸 (SIZE) A4

REV 0

修订 REV	修改摘要 REVISION DESCRIPTION	日期 DATE	签名 SIGNATURE
-	-	-	-